

RONDO

TECHNICAL PARAMETERS AND EQUIPMENT

Arena | Dino | Polo | Divan | Rondo | Master

Traditional interior design of Rondo is recognized for its simple elegance in consistent harmony with ergonomics. The sets of water and air jets are adapted for the hydrotherapy, while several positions offer the back massage with an impact on

problematic lower back parts. The jets are anchored in special cascades. Massage performance can be regulated by air injection. Rondo has integrated overflow channels and its standard accessories include also the cover to minimize energy losses.

MODEL SPECIFICATION

Shell size	200 × 200 × 82,5 cm
Frame size	200 × 200 × 99 cm
Water volume	980 l
Dry weight	270 kg
Filled weight	1250 kg
MassiveShell Construction color range	yes 11+
Adjustable installation frame	yes
PU insulation	yes
Total seating	5-6
Inflow – integrated overflow channels	yes
Number of outfalls	4
Bottom outlet / sand filtration discharge	yes

MASSAGE

Total number of jets	36
Water jets	27
Air jets	9
TurboBoost system	central
Boost Control regulation	1

CONTROL

USSPA iNtelligSmart® electropack	yes
ISM® control system	yes
Control keypad on electropack	yes
Control via PC application (connection to local LAN needed)	yes
Selfdiagnostics with optional protocol	yes
Control of lifetime of selected components	yes
iNcontrol piezo buttons	3


TECHNOLOGY

Pump 1	1,5 kW + 3 HP
Commercial air blower	yes
Sand filtration	yes
Equalising tank	yes
Automatic water level sensor	yes
Automatic water refilling	yes
Heater	9 kW Titanium Coil
UV lamp	yes
Automatic chemistry dosing	yes
Flowmeter	yes
Light	yes

OTHER STANDARD EQUIPMENT

Handrail	4 / stainless
Cover / color range	yes / 8+

We will be happy to present you with further options of accessories and services. Visit our showrooms.

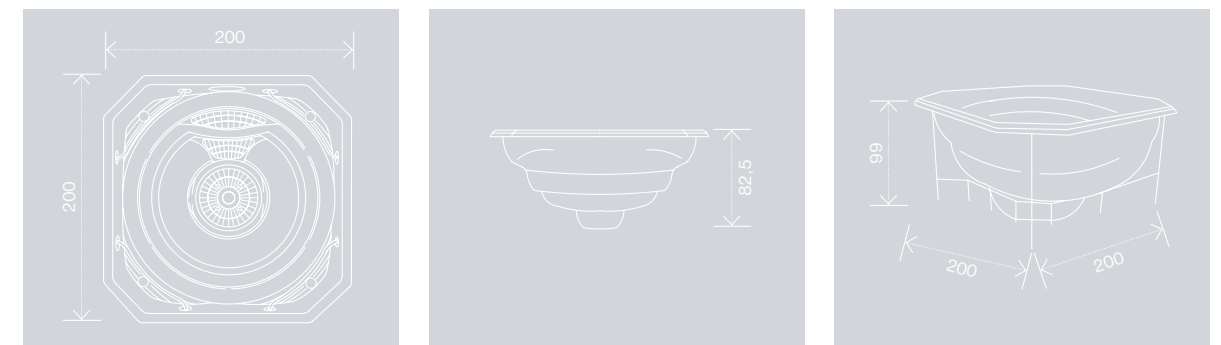

Electrical connections:

- for the massage technology connection - CYKY 5C x 2,5 circuit breaker 20 A char. "C", Current protector I Δ n = 0,03 A in the spa ground plan.
- for the filtration technology connection - CYKY 5C x 4 circuit breaker 25 A char. "C", Current protector I Δ n = 0,03 A in the filtration technology area.

